

---

# SMARTSLYDR INSTALLATION & SET UP GUIDE

## TOP MOUNT (FOR THE DOOR OR WINDOW)



Refer [Bottom Mount Instructions here](#).

# INDEX

Topics	Page Number
1. <a href="#">Top Installation</a>	3
2. <a href="#">Mobile Set up – SmartSlydr</a>	22
<a href="#">PetPass/One Button Setup</a>	35
3. <a href="#">Google Home Set up</a>	41
4. <a href="#">Alexa Set up</a>	49
5. <a href="#">Schedule Operation - SmartSlydr</a>	58
<a href="#">Schedule Operation - PetPass Enable/Disable</a>	59
6. <a href="#">Manual Operation</a>	60
7. <a href="#">Troubleshooting Q&amp;A</a>	61

**Note:**

Please don't get overwhelmed with the guide, we have made it detailed for DIY beginners.

The whole process can be completed relatively quickly within 15-30 minutes.

If you need help during this process, email at [support@LycheeThings.com](mailto:support@LycheeThings.com) or text at **650-830-1726**.


# Welcome to the SmartSlydr family!

## Tools Preferred for the Installation

- Powered Screwdriver with PH2 bit.
- A pencil/pen for marking.

# Unboxing


## ■ SmartSlydr

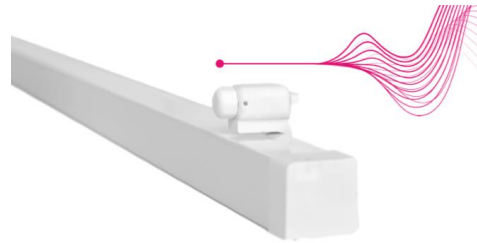

## ■ PetPass/OneButton



## ■ Accessories

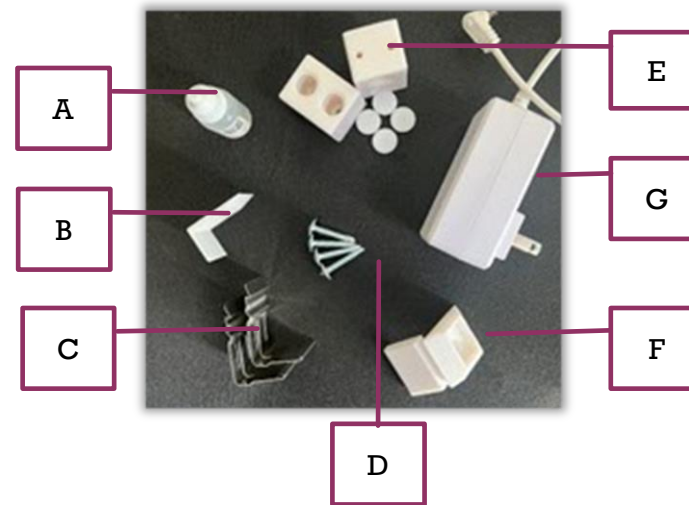

A. Lubricating Oil

B. Measuring Tool

C. Brackets/Clamps\*

D. Screws

E. Flat Mounting Brackets (Sent only if requested)

F. Corner Cap (Front and Side edge)

G. Power Supply <sup>4</sup>

\*Brackets(C) will be attached to the SmartSlydr. Please detach using long edge of Measuring Tool(B). The door wider than 6ft will be given additional Small End Bracket.



# Section 1: Top Installation

## 1.1 Track Cleaning

- Clean the bottom track – Refer to the [video](#).
- Apply **(A) Lubricating oil**.
- It will be good for 3-4 applications.
- Save the oil for later use.
- Recommended to clean up and lubricate the door every six months.

# 1.2 Marking

- Mark the position for two **Brackets (C)** approx. at the equal distance from both the end of SmartSlydr as shown in the below figure A.
- For the door wider than 6 ft, keep the SmartSlydr to the fixed panel side as shown in figure B. Small end bracket can be install after the SmartSlydr is attached in step 1.4.a.

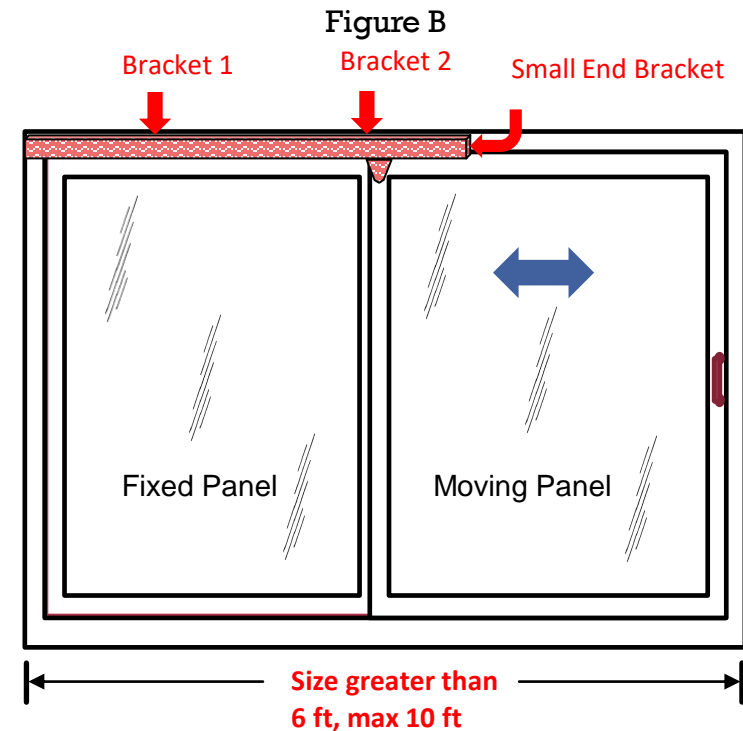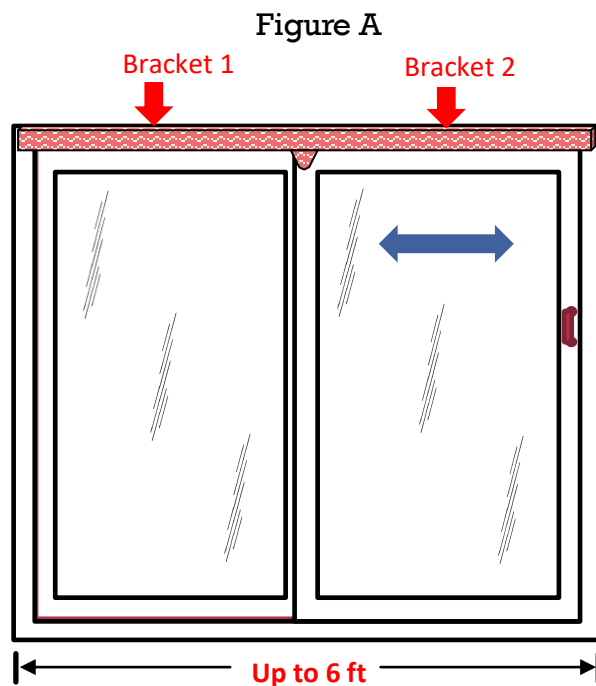

## 1.3 Positioning of Bracket on Top Surface

*(Jump to step 1.3.a if no enough space for brackets.)*


- Position the **Bracket (C)** on the top surface
- Insert the **Measuring Tool (B)** in between **Bracket (C)** and the frame to make the recommended distance away from the frame.



## 1.3.a Positioning Flat Mounting Brackets

*Note: Skip this step if you have enough space for top mounting surface. These brackets are not included if not requested.*

- Position the **Flat Mounting Bracket (E)** on the flat surface. Mount each with 2 self threading **Screws (D)**.
- Position the **Bracket (C)** on the bottom surface of the **Flat Mounting Bracket (E)**.
- Insert the **Measuring Tool (B)** in between **Bracket (C)** and the frame to make the recommended distance away from the frame.

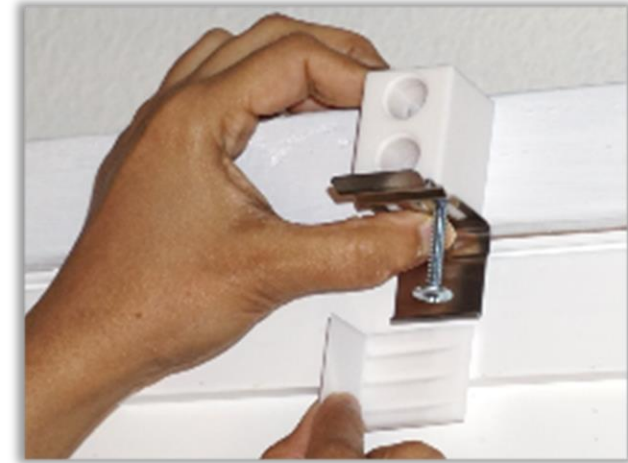



# 1.4 Mount Brackets (Top or Flat Mount)

- Mount the both **Brackets (C)** with provided self-threading **Screws (D)** using a screw driver.

*(In less likely situation if there is no stud behind the drywall, you might need to use drywall anchors. If you have metal other than aluminum on the top, use a drill bit - smaller than your screws - to drill pilot holes through your bracket marks.)*




- Mount the both **Brackets (C)** to the **Flat Mounting Brackets (E)** with provided **Screws (D)** using a screw driver.
- Cover the both holes with the lids.



## 1.5 Take out Antenna

*Skip this step if PetPass set up is NOT required. This step is not required for OneButton set up.*

- Take out the Antenna by opening the side cap (usually another side of the power supply) if you are going to use PetPass only. Not needed for the OneButton.

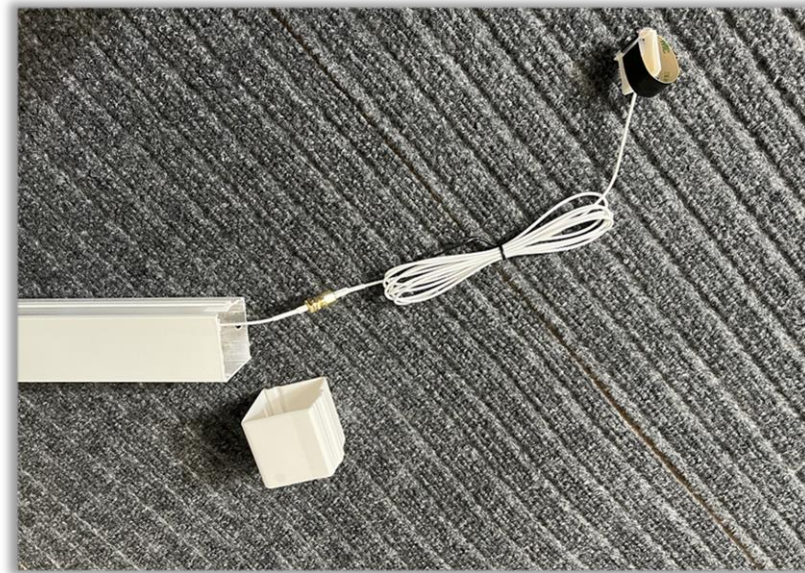

## 1.6 Install the SmartSlydr

- Install the SmartSlydr by attaching into the **Brackets (C)**. Rotate back until you hear it snap into place.
- If you facing any issue with this step, slide the moving panel away from the SmartSlydr head (rounded rectangle).



## 1.6.a Mount Small End Bracket

**Note: Please skip this step if your door size is within 6ft.**

- Position the **Small End Bracket** at the end of the SmartSlydr.
- Remove the backing from adhesive tape and stick it as shown in the picture on the top surface.
- It can be secured through screw if end cap isn't sticking well to the surface.
- If no top surface is available, it can be stick to the front edge.





## 1.7 Corner Cap Marking (1 / 2)

- Keep the moving panel in the close position, and place the **Measuring Tool (B)** short edge touching the SmartSlydr as show in the picture to mark the bottom edge.



## 1.8 Corner Cap Marking (2/2)

- Open the moving panel and repeat the same step as 7. Ideally both marking should be the same or less than 1 cm (3/8 inch).

(In very rare scenario, if the distance between two markings is  $>1$  cm (3/8 inch) then levelling needs to be done by placing the padding between the brackets.)





## 1.9 Frame Cleaning

- Use a clean cloth to wipe down the area where you're applying the **Corner Cap (F)**.

## 1.10 Stick the Corner Cap – Side Edge

- Remove backing from adhesive tape of the side edge of the **Corner Cap (F)** only (**Do not remove front edge backing from adhesive tape yet**).
- Slide the side edge of the **Corner Cap (F)** while keeping the front attached to align properly to match the bottom markings with corner cap bottom edge. Apply the pressure for a few seconds.

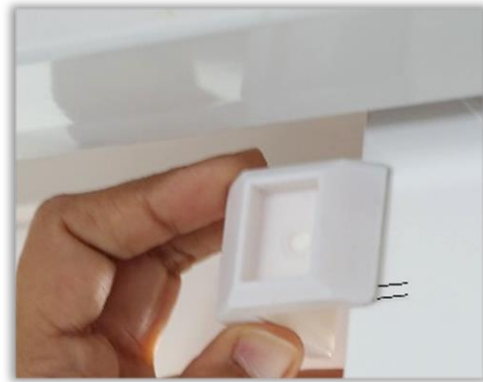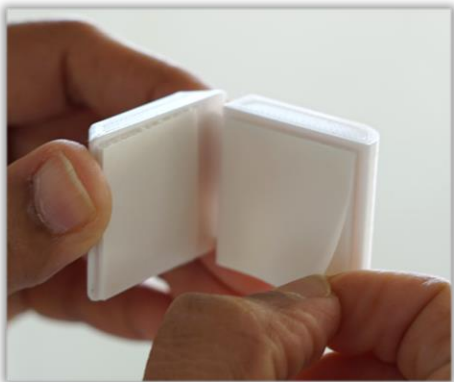



## 1.11 Stick the Corner Cap – Front Edge

- Now detached the front edge of **Corner Cap (F)** using **Measuring Tool (B)**.
- Remove backing from adhesive tape.
- (1) Keep pressure on the side edge, and (2) Stick the front edge applying the pressure for a few seconds.



## 1.11.a Attach the Corner Cap with Screw

*This step might be needed only if Corner Cap isn't sticking well to the door frame material or if there isn't enough area for adhesive pads to stick firmly on the frame.*

- Place the **Corner Cap (F)**, and attach it with the self-threading screw on the door/window frame.



## 1.12 Latch the Corner Cap with Head

- Slide the moving panel to latch **Corner Cap (F)** with the Head.
- If it isn't latching properly, adjust the length of the head attachment by rotating the nut.



# 1.13. Stick the Antenna

*Skip this step if no PetPass set up required. This step is not required for One Button use.*


- Remove the backing from an adhesive tape of the black Antenna and its cover, taking care not to damage it. Attach it to the door frame starting from the front and moving towards the inside, as illustrated in photo (i). The goal is to have black strip as outer as possible. Refer the **photo (iii)** for the location of the **PetPass antenna sensor**.
- To prevent the wire from dangling, use the **organizer clips** to secure it on the door frame as photo (ii).



(i)




(ii)

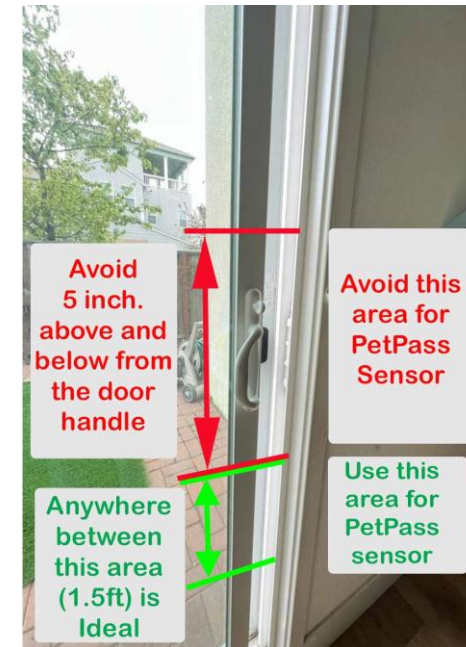

(iii)

## 1.14. Attach the Power Supply

Please use the power cord organizer clips to secure the cord.

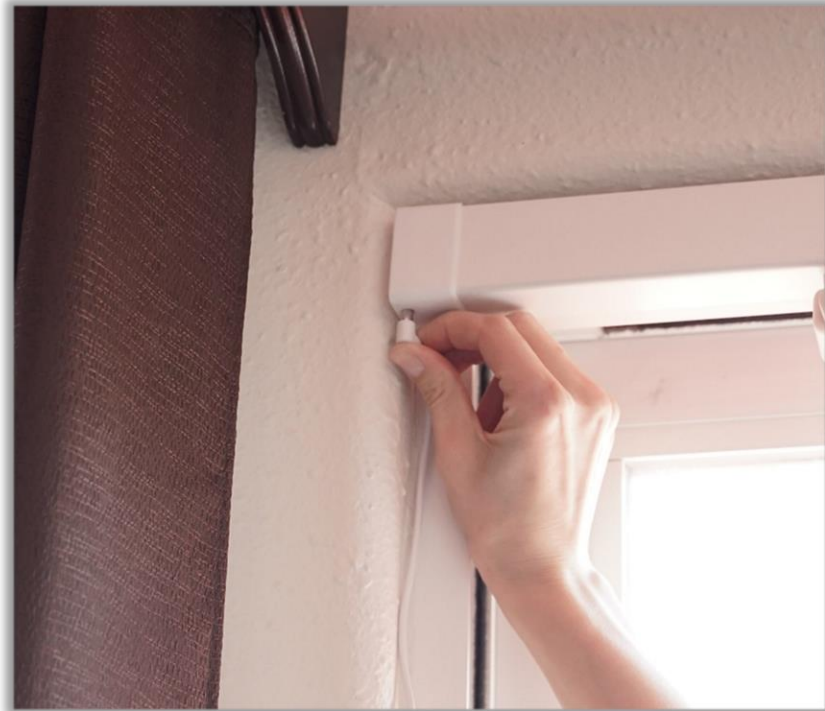

**Congratulations! Your SmartSlydr is ready to be set up via mobile app.**

## SECTION 2 MOBILE SET UP

Please download **Lychee Things** app and pair the **SmartSlydr**.



## 2.1 Click on the “Sign Up” at the bottom.

**Sign In**

Email

Password


[Forgot password?](#)

**Sign In**

Don't have an account? [Sign Up](#)



2.2 Enter the email and click the “Sign Up” button. You will receive the temporary password in the email. Please create your new password and Sign in.

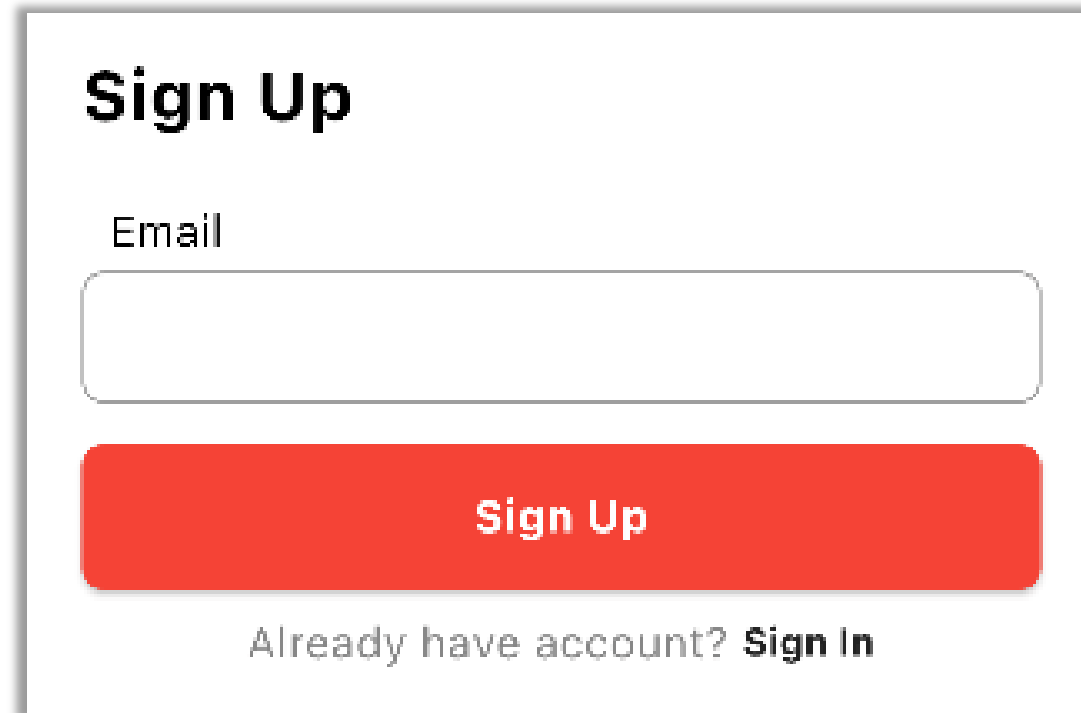A sign-up form with a white background and a thin grey border. At the top left, the text "Sign Up" is displayed in a bold, black, sans-serif font. Below this, the word "Email" is written in a smaller, grey, sans-serif font. Underneath "Email" is a large, empty, rounded rectangular input field with a thin grey border. Below the input field is a prominent red button with rounded corners and the text "Sign Up" in white, bold, sans-serif font. At the bottom of the form, the text "Already have account? Sign In" is displayed in a grey, sans-serif font, with "Sign In" being bolded.

**Sign Up**


Email

**Sign Up**

Already have account? **Sign In**




## 2.3 Click on the “+” sign on the top right to add the SmartSlydr device.

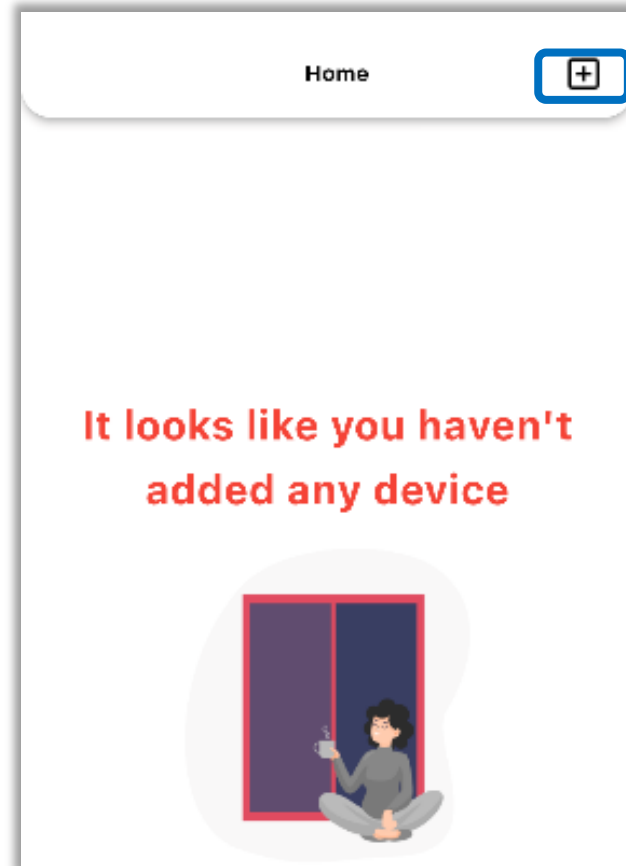

2.4 The app will display the SmartSlydr. Click the “Connect Device”. Keep your phone closer to SmartSlydr during this step.


*(If you have any issue with this step, please refer to Troubleshooting section at the end.)*

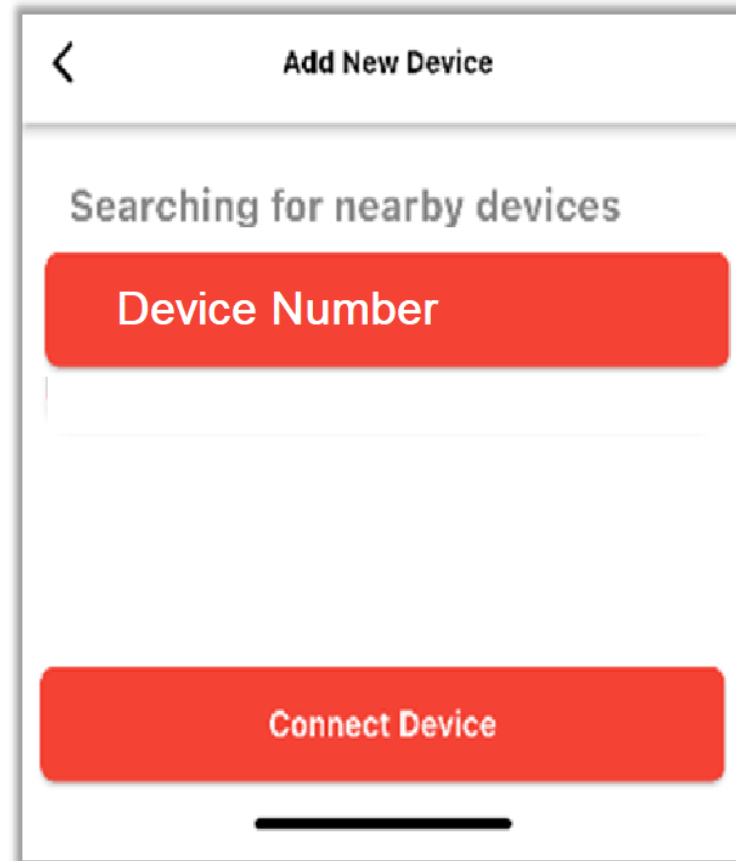


2.5 It will fetch a nearby Wi-Fi list, please connect to your Wi-Fi network.

- Please select your wi-fi network.
- Enter the password.


## 2.6 Select the device installation place and click the “Next” button.

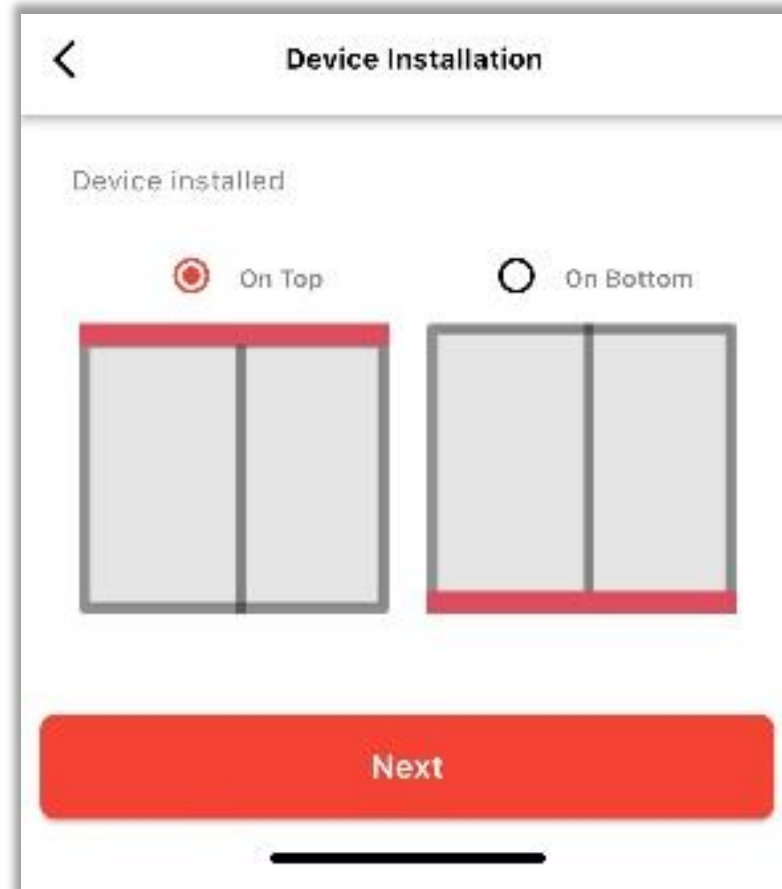

## 2.7 Select the direction of the Moving panel and click the “Next” button.

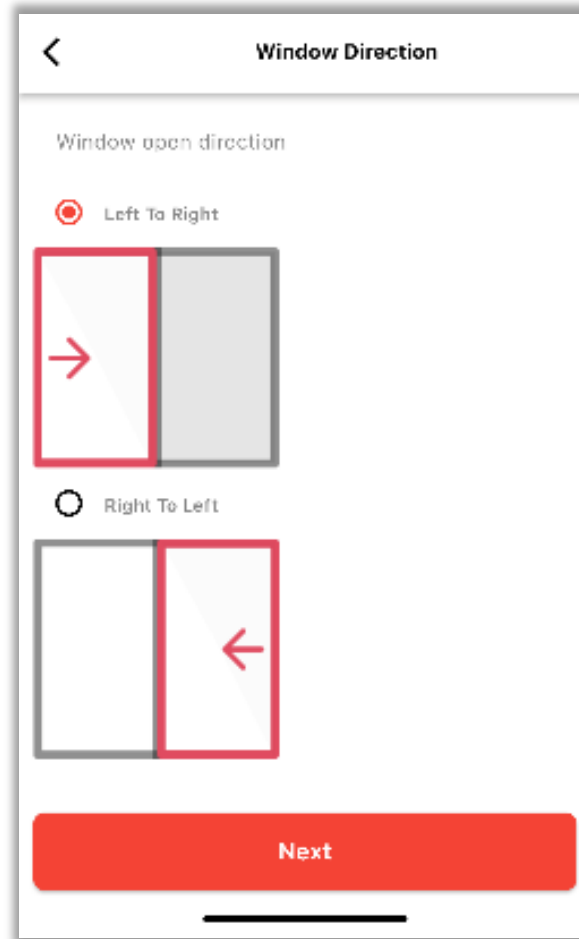


2.8 Enter the device name. Select the Room from the default Rooms or add the custom Room. Click the “Next” button.

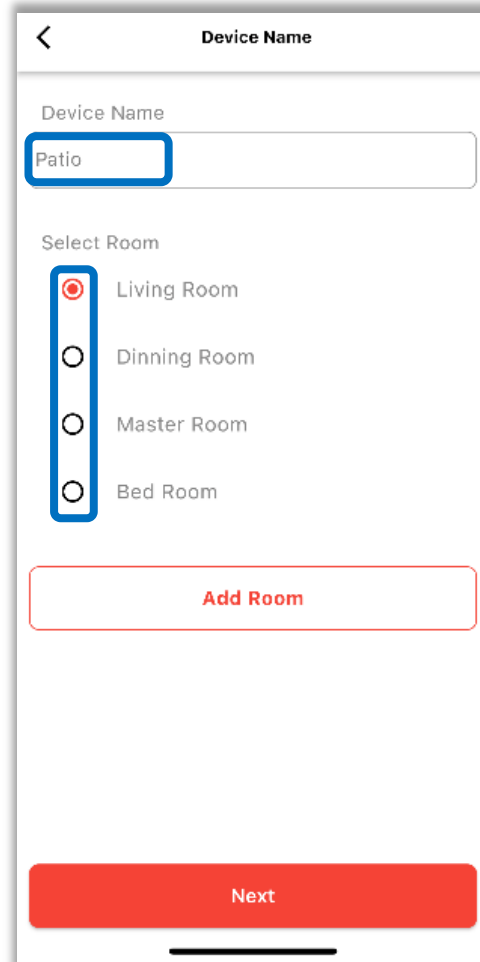


The screenshot shows a mobile application interface with a white background and a dark purple header. The header contains a back arrow on the left and the text "Device Name" in the center. Below the header, there is a text input field labeled "Device Name" containing the word "Patio". A blue rectangular box highlights the input field. Below the input field, there is a section titled "Select Room" with four radio button options: "Living Room", "Dinning Room", "Master Room", and "Bed Room". A blue rectangular box highlights the "Living Room" radio button. Below the radio buttons, there is a red rectangular button with the text "Add Room". At the bottom of the screen, there is a large red rectangular button with the text "Next".

## 2.9 SmartSlydr will calibrate and measure the force required to operate. Click the “Start Calibration” button.


*(If you don't see the start calibration button, please follow the troubleshooting guide.)*

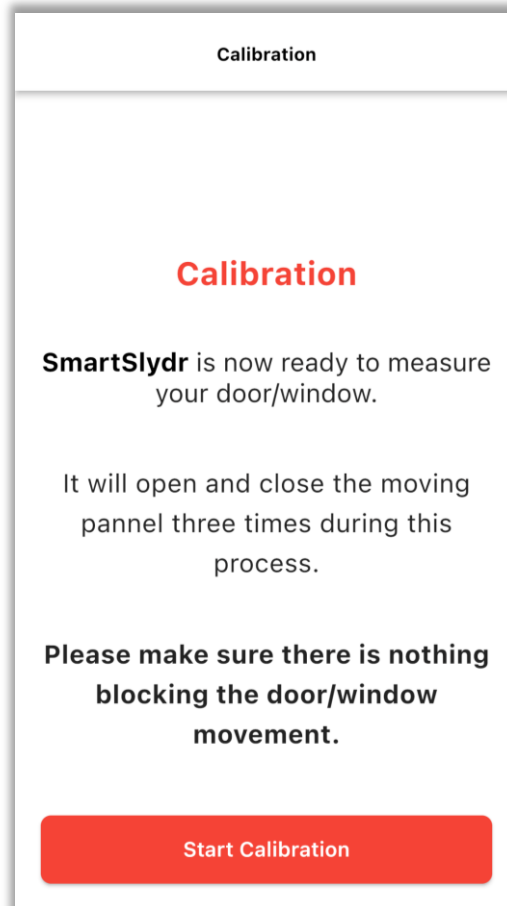

- SmartSlydr will automatically measure the required force and the location of close and open positions for the door/window.
- Please try not to temper the movement.
- Refer to troubleshoot if the door/window isn't opening or closing properly during this step.

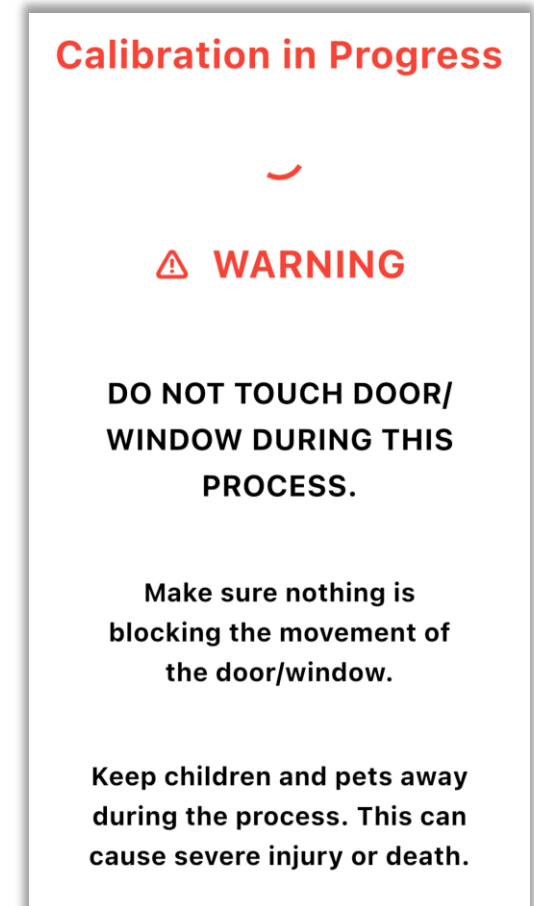


## 2.10 SmartSlydr is ready to slide.

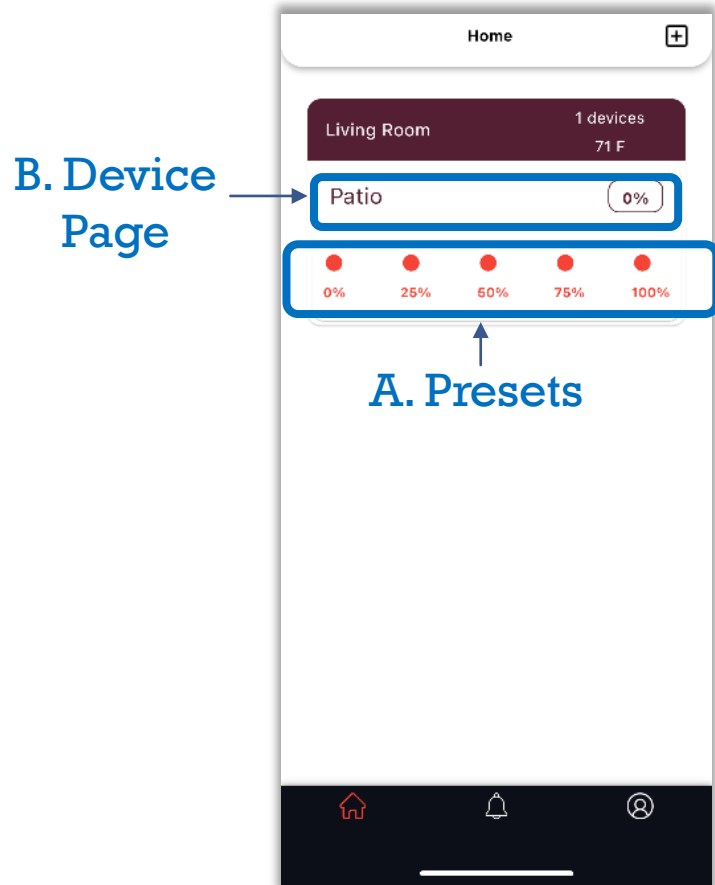

- A. Touch the preset buttons to select the pre-defined opening widths.
- B. Touch on the Device Name for Device page. Customize opening can be selected from the device page.



## 2.11 Slide the panel to operate the SmartSlydr.

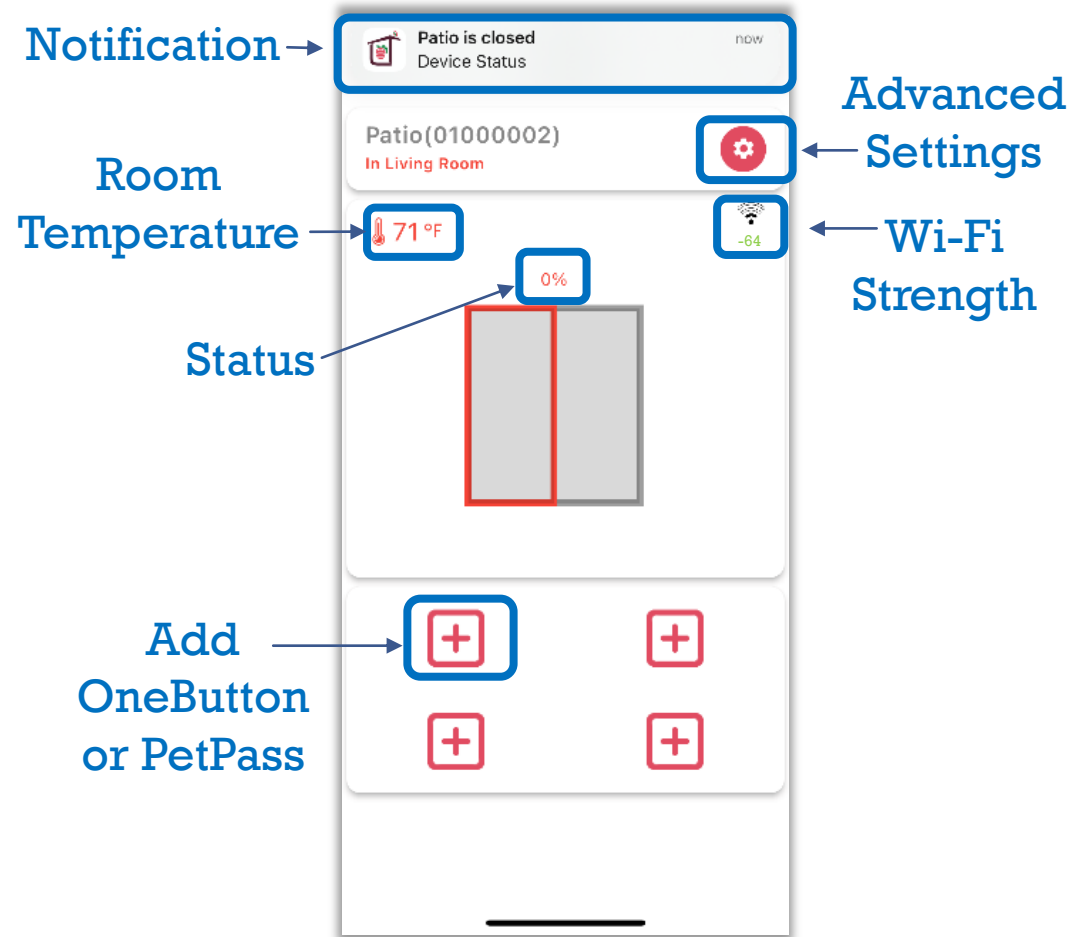

- If your Wi-Fi strength is between -75 to -90, please try to place your Wi-Fi router nearby to SmartSlydr or try upgrading your network for the best experience.


---

THANK YOU!

Set up is complete.  
Slide the door/window with SmartSlydr!


You can continue with next steps to add PetPass/OneButton.

## 2.12 PetPass/OneButton Set Up.

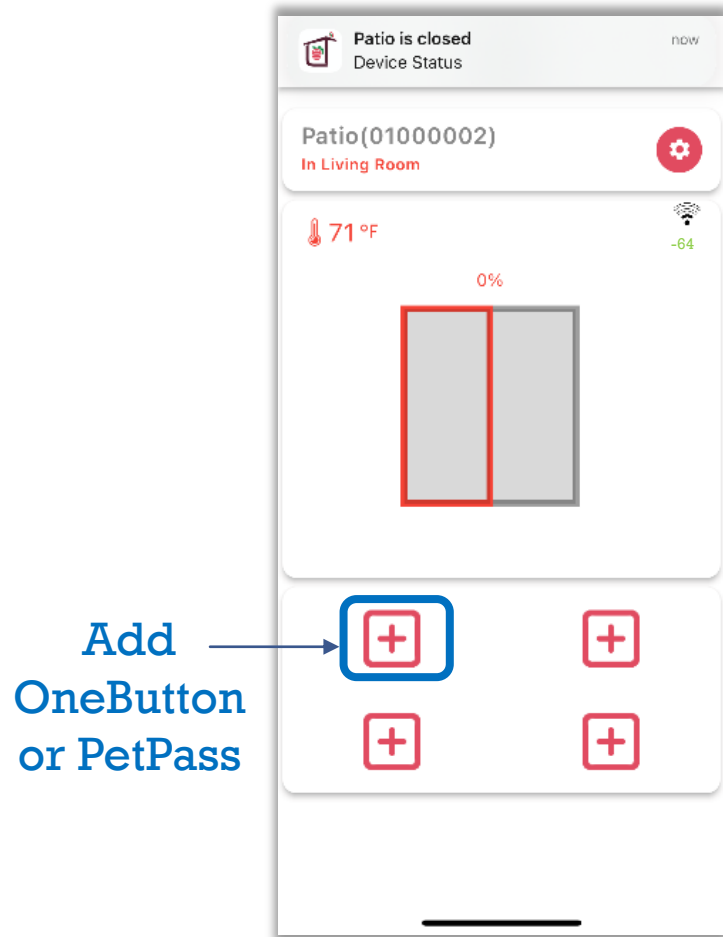

- Click the + button to pair the OneButton or the PetPass.

## 2.13 Pair as the OneButton or PetPass.

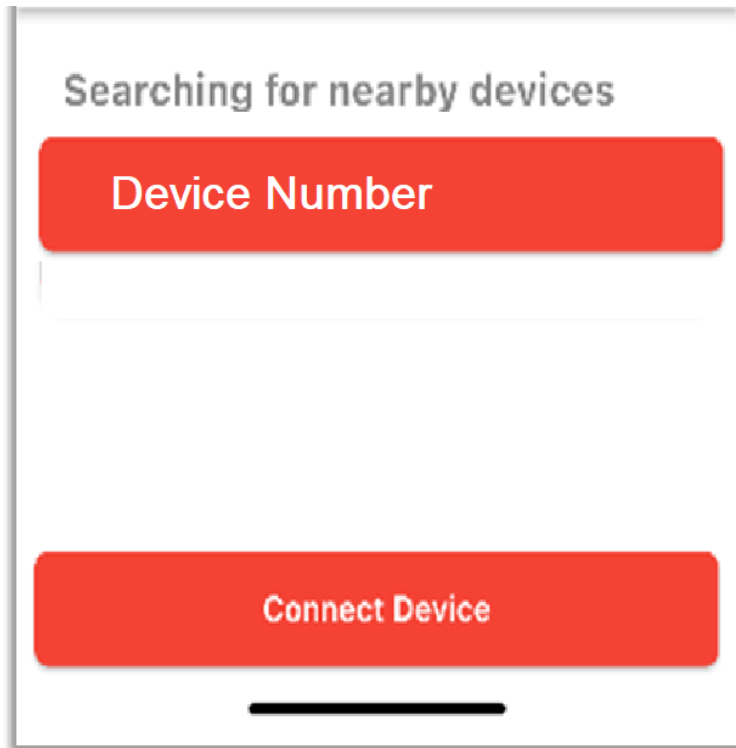

- Turn on Bluetooth.
- Press the physical Tag to turn it on. You can see the blinking light. (If the light doesn't turn on, long-press the button until you see a light then leave the button to power off. Press the button again to power it on.)
- Tag will show up on the app screen. Click the "Connect Device".
- If you see multiple devices, keep other tags away from the phone. (or try selecting them one after another.)

## 2.14 Pair as the One Button.

A Tag will stop blinking a few seconds after pressing the “Save” button.

*Skip this step to pair as PetPass*

The screenshot shows the 'PetPass/OneButton Settings' screen. At the top, there is a 'Name' field with a placeholder 'Enter Remote Name'. Below that is the 'Opening Mode' section with two buttons: 'PetPass' and 'One Button', where 'One Button' is selected. The 'Select Opening' section shows a dog icon and a horse icon with a slider between them. The 'PetPass Sensitivity' section has a slider between 'NEAR' and 'FAR'. The 'Close After' section shows a time selection table:

MM	SS
29	14
00	15
01	16

At the bottom, there is a large red 'Save' button.

1. Enter the name of the One Button.
2. Select the One Button.
3. Please ignore the PetPass settings those are required for PetPass mode only.
4. Click “Save”.
5. Wait for 30 secs to get One Button synchronized with SmartSlydr.
6. Press the Button and SmartSlydr should start moving.

The screenshot shows the 'Patio' screen. At the top, it says 'Patio' and 'In Bedroom'. Below that, there is a temperature display showing '71 °F' and a battery level indicator showing '0%' and '-85'. A large slider is shown with a red bar on the left and a grey bar on the right. Below the slider, there are four buttons: a red diamond button labeled 'One Button', and three red plus sign buttons. At the bottom, there is a 'Deactivate' button and an 'Activate' button with a red dot.

## 2.15 Pair as the PetPass.

A Tag will stop blinking a few seconds after pressing the “Save” button.

*Skip this step for One Button*

The screenshot shows the 'PetPass/OneButton Settings' screen. It includes a 'Pet Name' field with 'Max' entered. The 'Opening Mode' is set to 'PetPass'. The 'Select Opening' section shows a dog icon selected. The 'PetPass Sensitivity' is set to 'NEAR'. The 'Operating Mode' is set to 'Automatic'. The 'Close After' field is set to 29:01 MM and 14:15 SS. A 'Save PetPass' button is at the bottom.

1. Enter the name of the Pet.
2. Select the operating mode “PetPass”.
3. Select the door opening for the Pet size.
4. Select Sensitivity, we recommend starting with 6. Near means, PetPass will open the SmartSlydr from near distance only. Adjust the value accordingly based on the few days of experience.
5. Select the automatic operating mode if you like a door to open when PetPass will come near the door.
6. Select the time you like to close the door once opened.
7. Click “Save”.
8. Allow 30 secs to get PetPass synchronized with SmartSlydr.
9. Take PetPass near to the Door and it will open the door to the selected value and closes it after the selected time.
10. Activate or deactivate all PetPass from the Device page as shown on right.

The screenshot shows the 'Patio' device page. It displays 'Patio In Bedroom' with a settings gear icon. The temperature is 71°F and the battery level is -84%. A slider is set to 100%. Below the slider, there are two rows of buttons: the first row has a dog icon labeled 'Max' and a plus sign; the second row has two plus signs. At the bottom, there is a 'Deactivate' button and an 'Activate' button with a red toggle switch.

## 2.15.1 PetPass Send Request Mode.

*Skip this step for One Button*

**PetPass/OneButton Settings**

Pet Name  
Max

Opening Mode  
PetPass One Button

Select Opening  
Dog Cat

PetPass Sensitivity  
NEAR FAR


Operating Mode  
Automatic Send Request

Close After  
MM SS  
29 14  
00 15  
01 16


Save PetPass

1. Select the Send Request mode. Change settings if you like.
2. Click “Save”.
3. Take PetPass near the Door and it will send the notification to the mobile app.
4. Go to the History page.
5. Allow to open the door to the selected value and closes it after the selected time.
6. You will get a notification for the operation.


### Phone Notification



### History Page of App

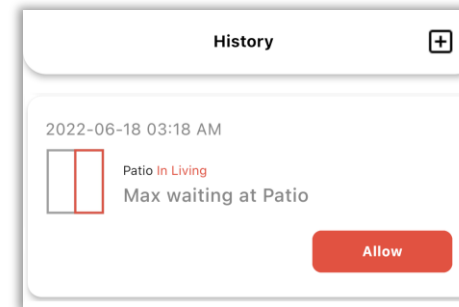

### Door Operation Notification

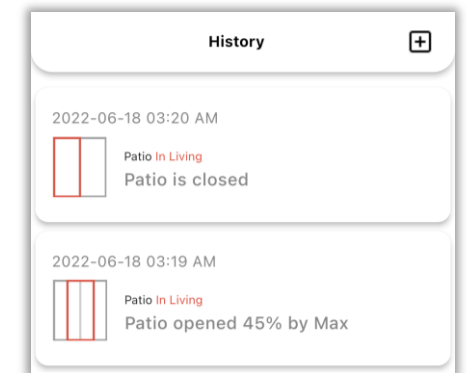

## 2.15.2 How PetPass works?

- SmartSlydr uses wireless communication to ensure proper operation is as accurate as possible, but the technology has limitations. Your SmartSlydr is more likely to accurately detect the PetPass if there is less disturbance from the other wireless devices in your home.
- When the Pet goes near the attached receiver on the door frame, there is a few seconds delay in the opening of the door. This is to prevent false opening when the pet just passes by the door without waiting.
- If the pet stays standing or sleeping near the door, once the door is closed in automatic mode the pet has to move away by 10-20ft for 10-15 seconds to re-trigger the opening. You will hear a chirp (small double beep) that indicate the SmartSlydr is ready again to open the door when it detects PetPass nearby.
- If the PetPass is present nearby before the chirp sound, it will ignore the opening automatically thinking the pet is sleeping or playing nearby to avoid continuous opening and closing.
- Please feel free to share your experience and feedback. We will try our best to incorporate the feedback in the future software updates.




## SECTION 3 SMARTSLYDR GOOGLE HOME SETUP



Please refer to the advanced guide at

[https://lycheethings.com/support/SS\\_SmartHome\\_Setup.pdf](https://lycheethings.com/support/SS_SmartHome_Setup.pdf)


### 3.1 Open the Google Home application. Click on the “+” located at top left.

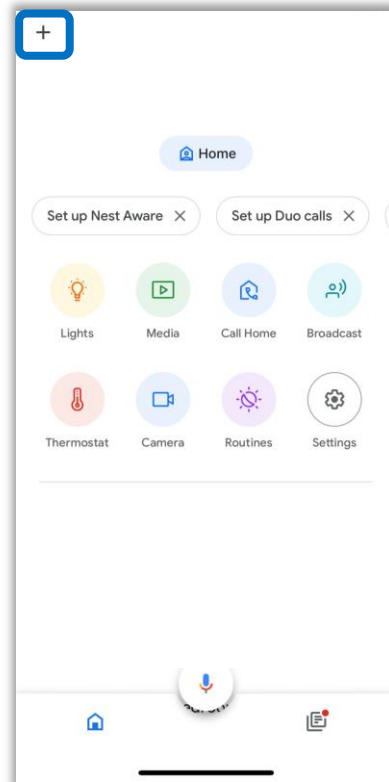


## 3.2 Click on the “Set up device” and then “Works with Google”.

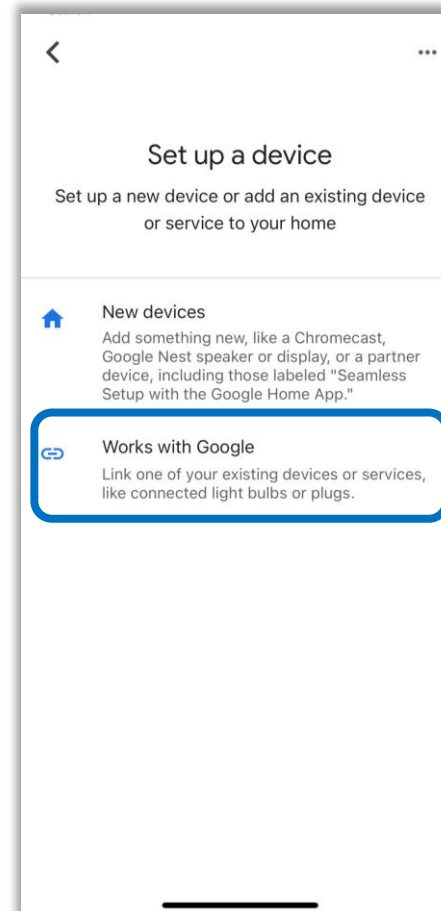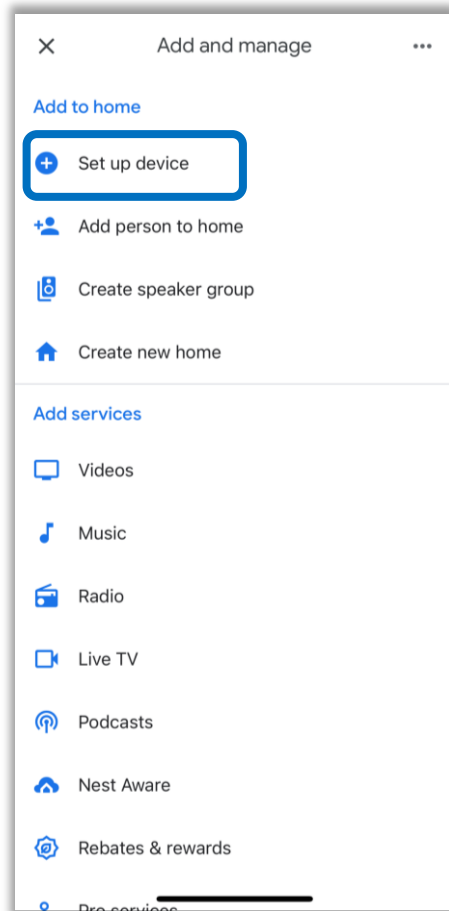

3.3 Click on the search icon 🔍 ”.  
Enter “SmartSlydr” and select it.



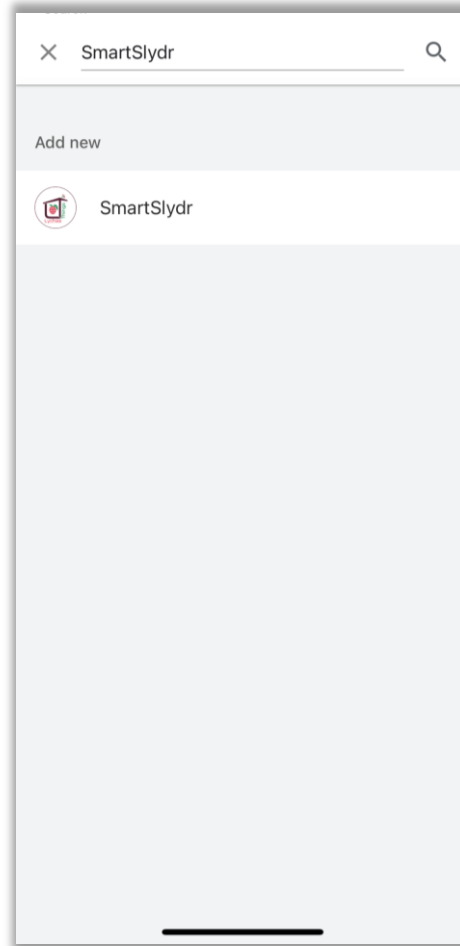


## 3.4 Sign in with your Lychee Things Email and Password.

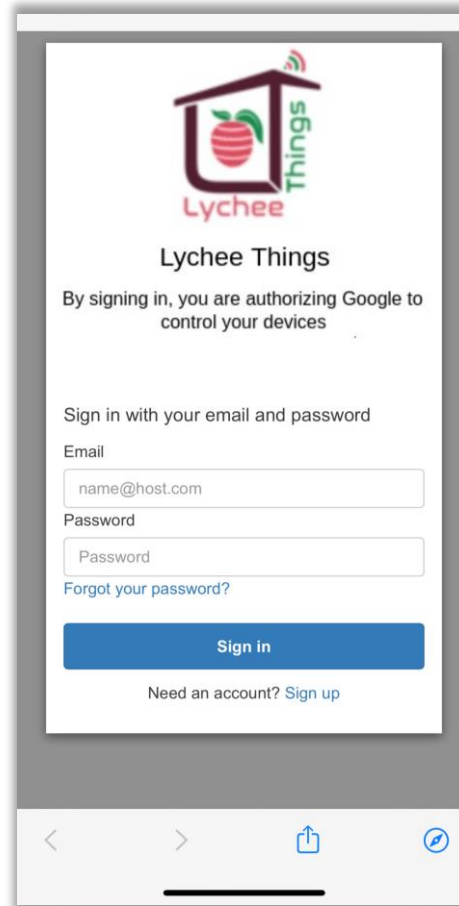

The image shows a mobile application interface for 'Lychee Things'. At the top is the app's logo, which consists of a stylized house shape containing a lychee fruit, with the text 'Lychee Things' below it. Below the logo, the text 'Lychee Things' is displayed in a bold font. Underneath, a message reads: 'By signing in, you are authorizing Google to control your devices'. The next line says 'Sign in with your email and password'. There are two input fields: 'Email' with the placeholder text 'name@host.com' and 'Password' with the placeholder text 'Password'. Below the password field is a link that says 'Forgot your password?'. A blue button labeled 'Sign in' is positioned below the links. At the bottom of the form area, there is a link that says 'Need an account? Sign up'. The entire form is set against a white background within a grey border that represents the mobile device's frame. At the very bottom of the frame, there are navigation icons: a back arrow, a forward arrow, a share icon, and a search icon.

3.5 You will see the new device/s with the name that you have assigned in Lychee Things SmartSlydr application. You can choose the fields where you like to locate the SmartSlydr in your home.

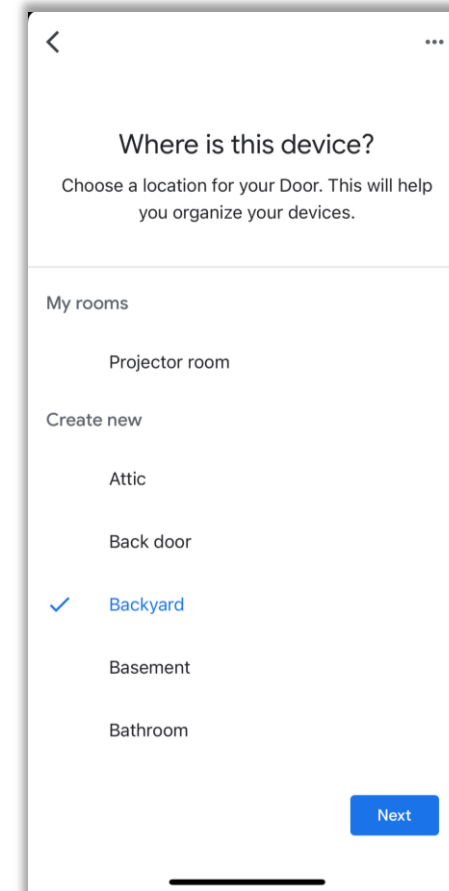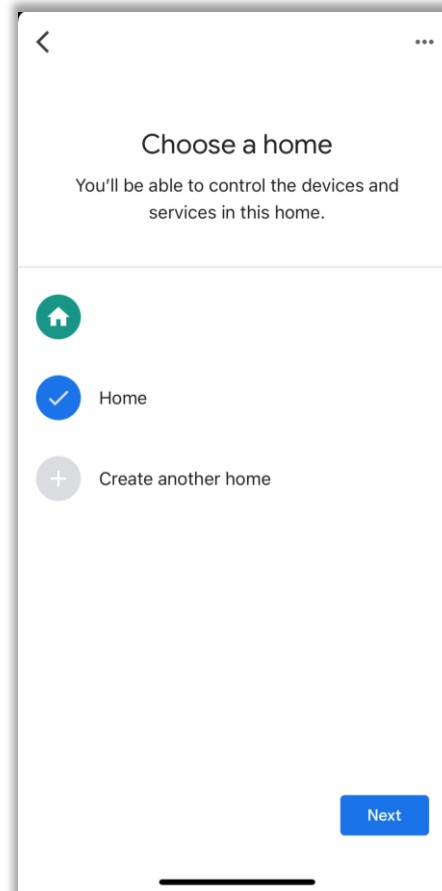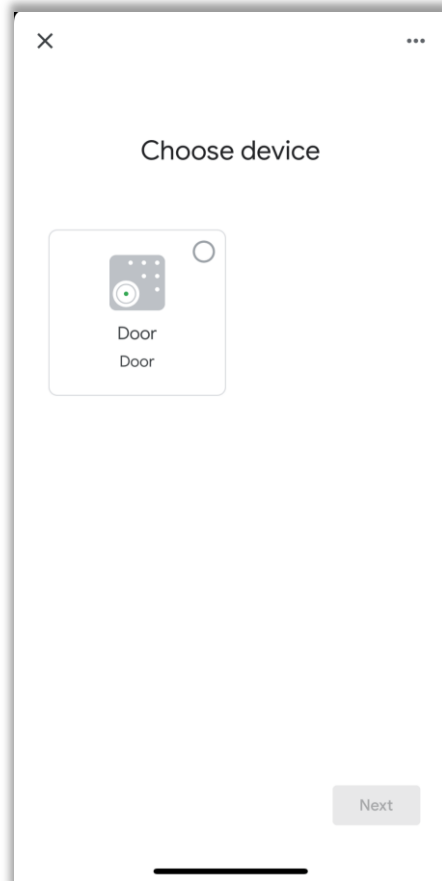

## 3.6 ALL SET!

Use your voice to give command to SmartSlydr.




Ok Google, Open <Device Name>!

Hey Google, Set “Door” to 60%!

Ok Google, Close the “Window”!

## 3.7 You can set the pin for added security to operate the SmartSlydr.

- Go to the Lychee Things SmartSlydr application.
- Go to Device settings page.
- Set the pin.
- Google Home Speaker to operate the device.
- Google Home will ask for the pin.
- Provide the pin.

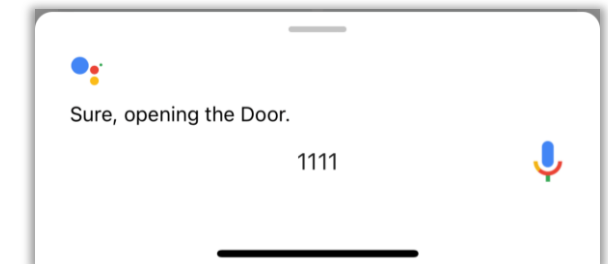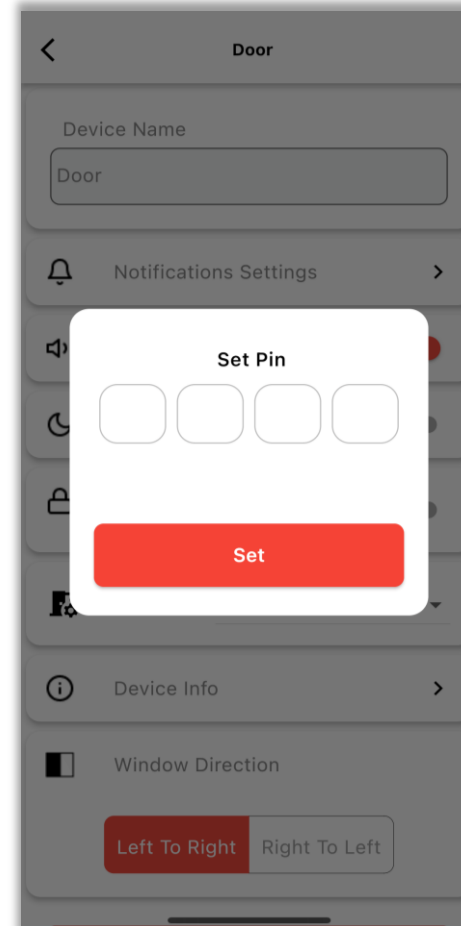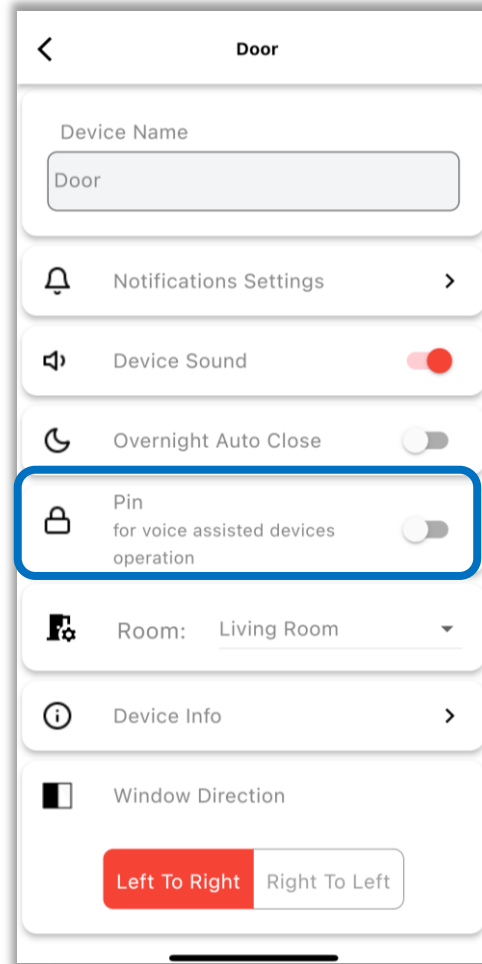







## SECTION 4 SMARTSLYDR ALEXA SETUP

Please refer to the advanced guide at  
[https://lycheethings.com/support/SS\\_SmartHome\\_Setup.pdf](https://lycheethings.com/support/SS_SmartHome_Setup.pdf)



## 4.1 Open the Amazon Alexa application. Click on the “More” located at bottom right.

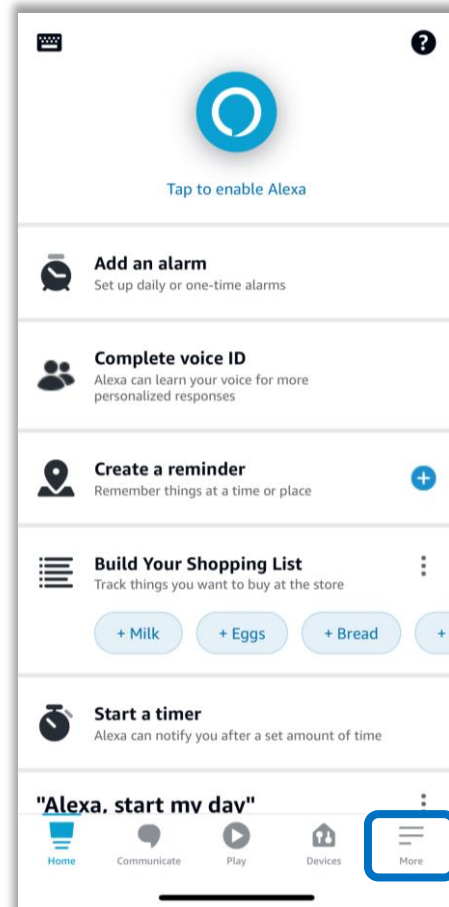



## 4.2 Click on the “Skills & Games”.

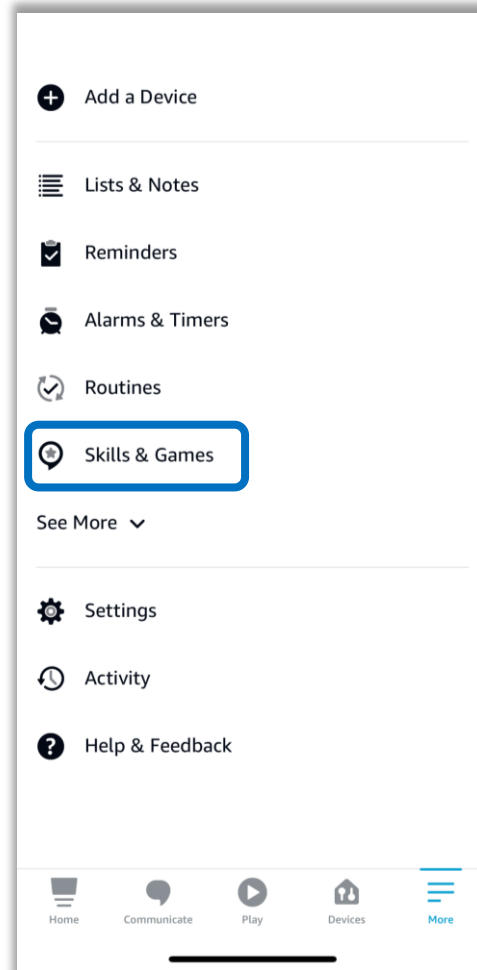



## 4.3 Click on the search icon 🔍 ”. Enter “SmartSlydr” and select the skill.

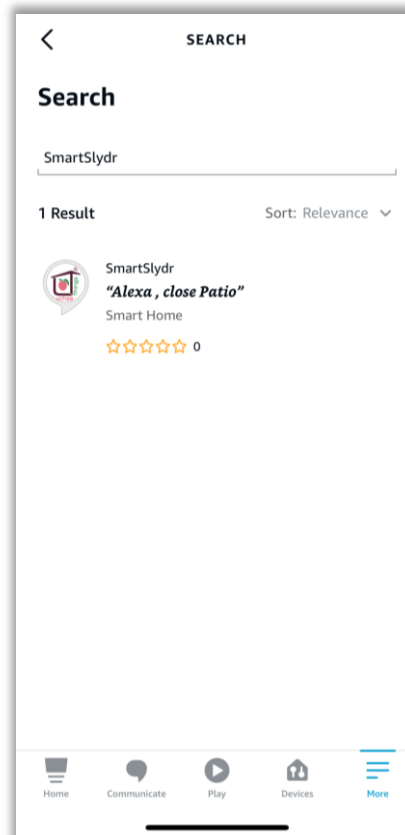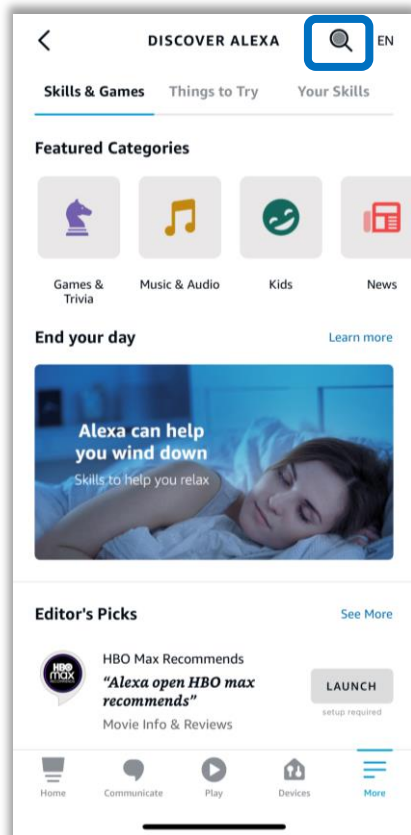


## 4.4 Click on “Enable To Use” and sign in with your Lychee Things Email and Password.

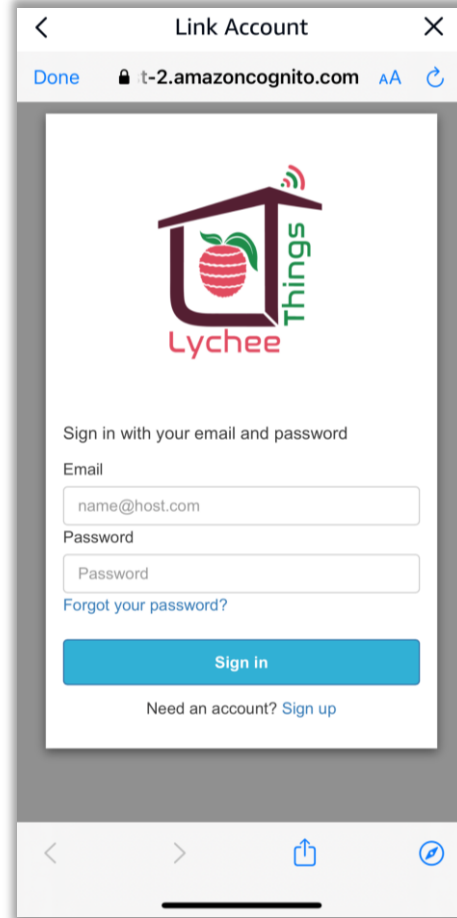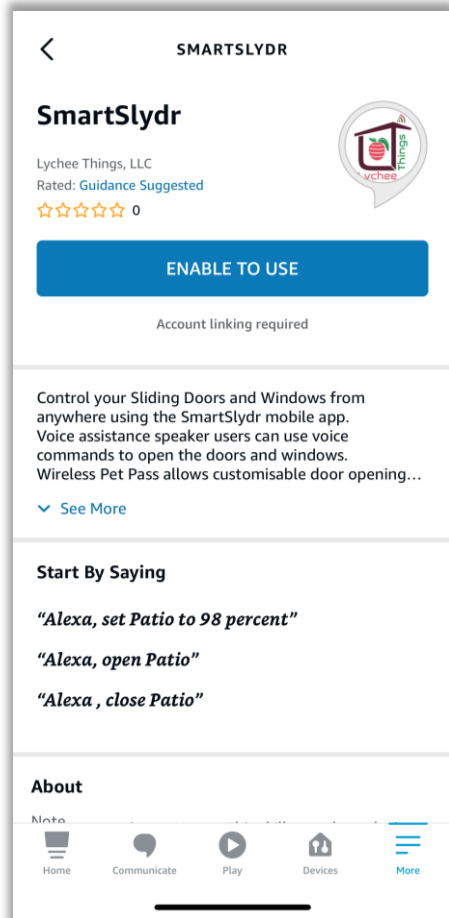

4.5 You will see the message for the successful linking of the SmartSlydr. Click the “Discover Devices” to use it with Alexa.

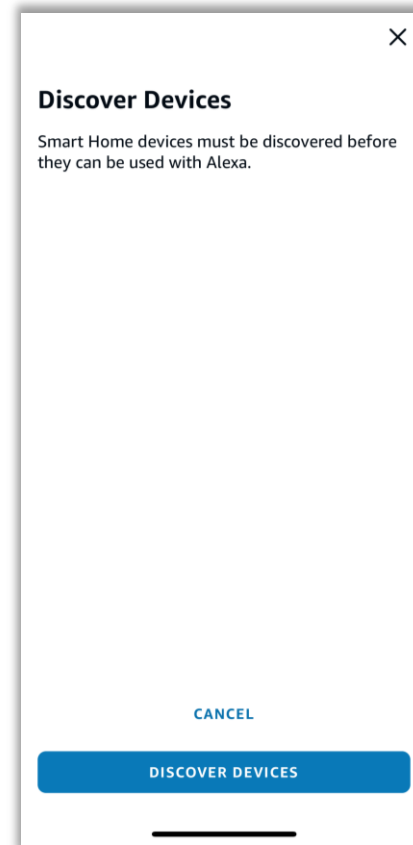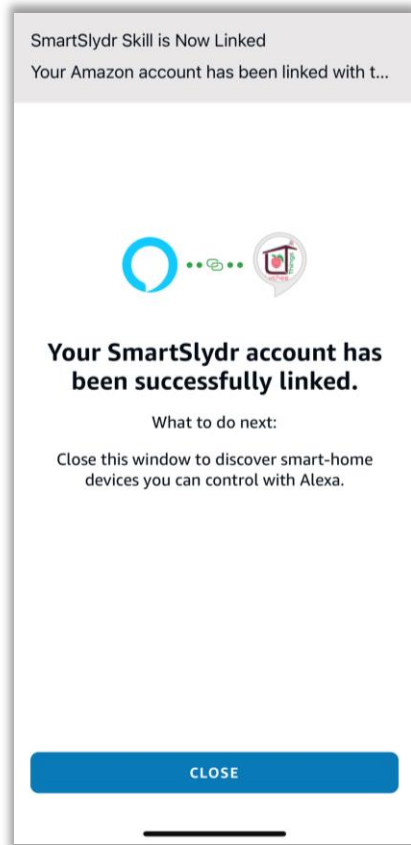

4.6 You will see the new device/s with the name that you have assigned in Lychee Things SmartSlydr application.

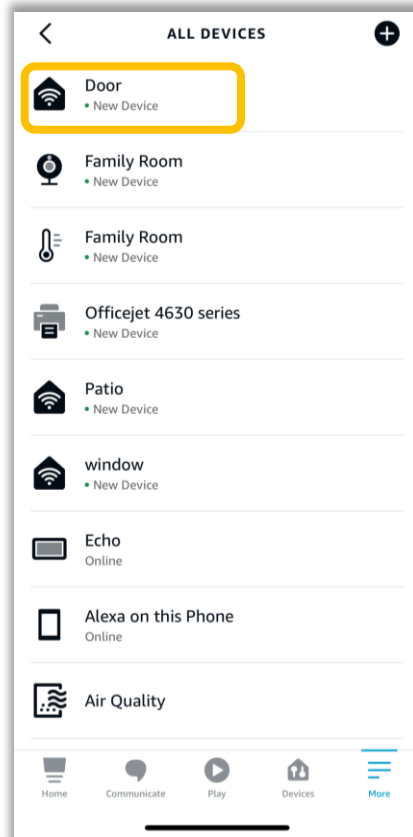

## 4.7 ALL SET!

Use your voice to give command to SmartSlydr.

Alexa, Open <Device Name>!





Alexa, Set “Door” to 60%!

Alexa, Close the “Window”!

Alexa, What is the “Patio” status?







# 4.8 Set your favorite phrase to operate the SmartSlydr.

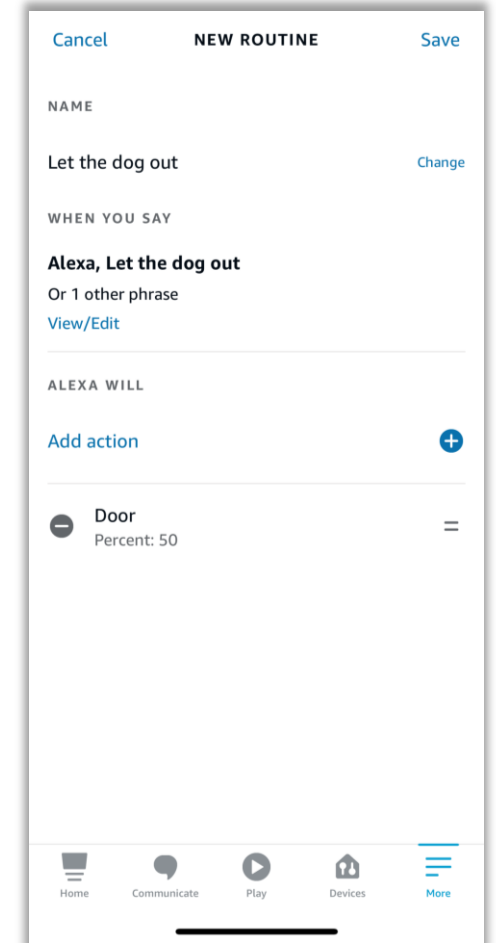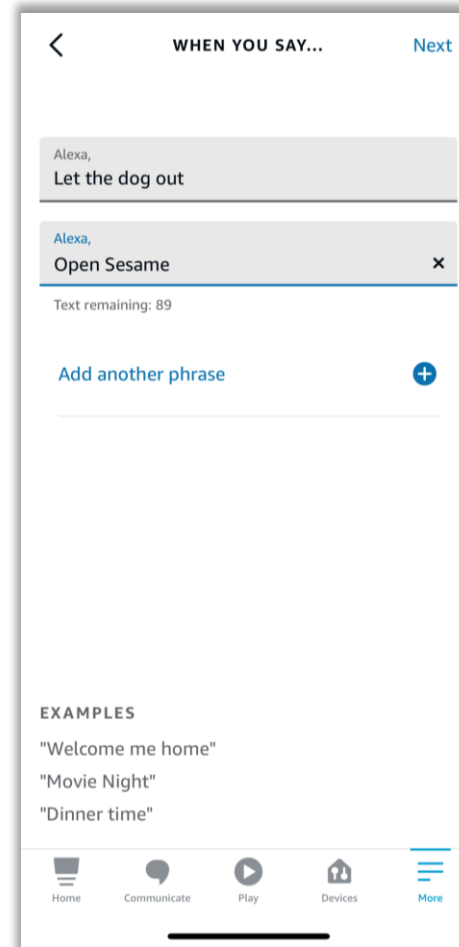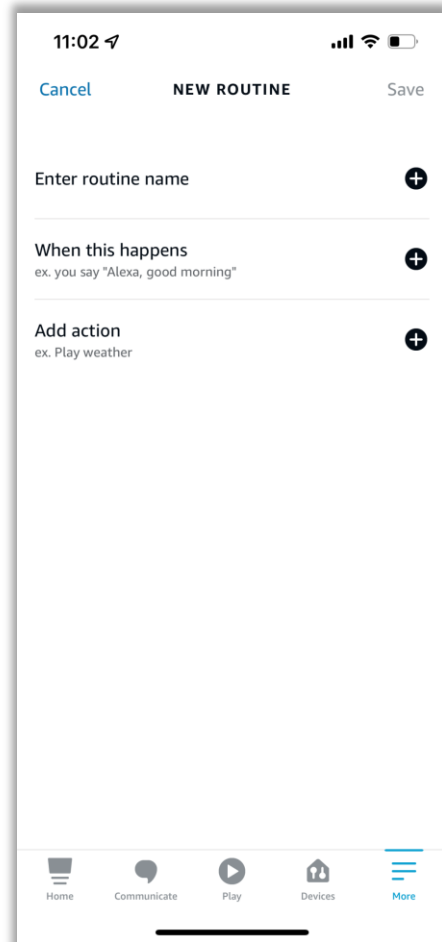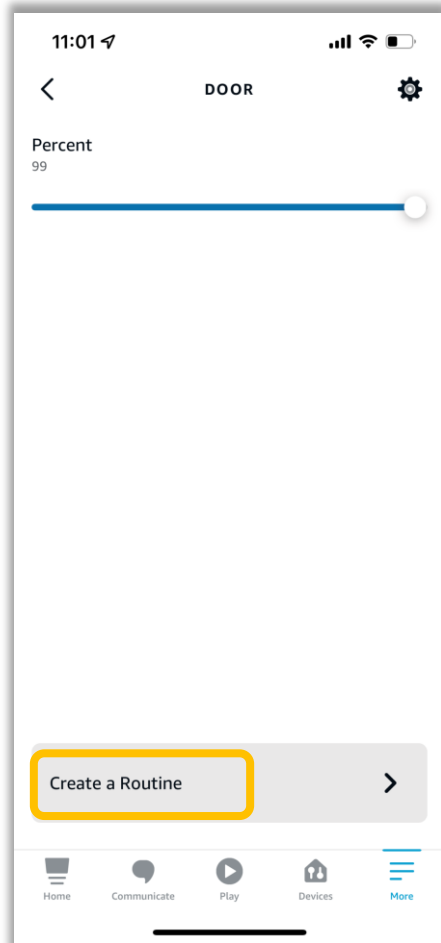





# SECTION 5(A) SCHEDULE OPERATION (Door Open/Close)

Schedule can be set via Amazon Alexa Mobile application. This can be used without Alexa speaker. Please refer the Section 4 to set up SmartSlydr with Alexa. And create routines to schedule the automated open and close as below.

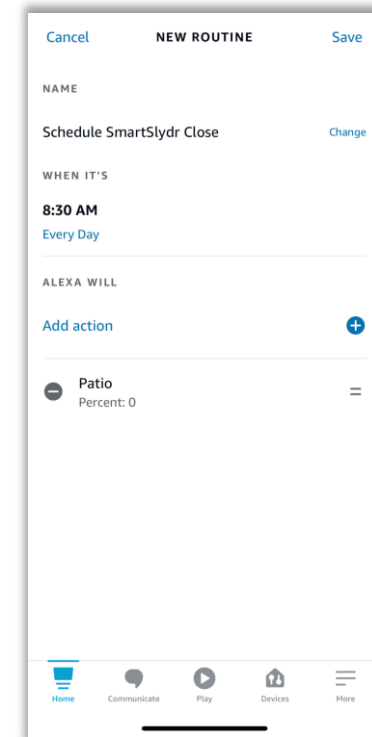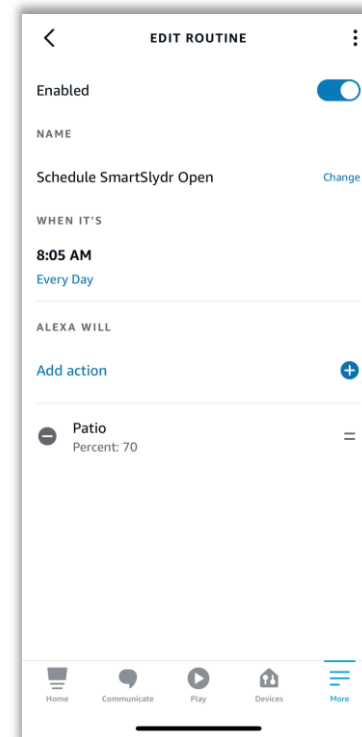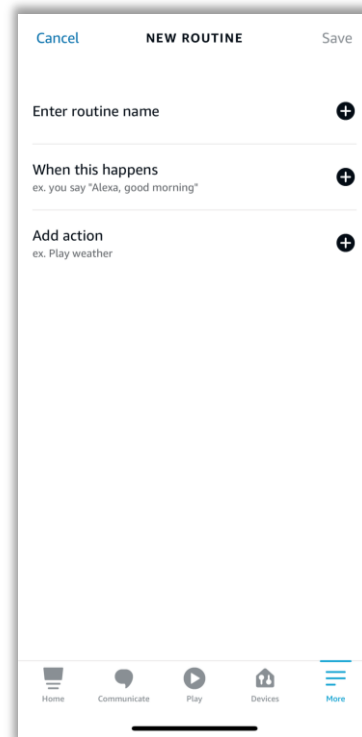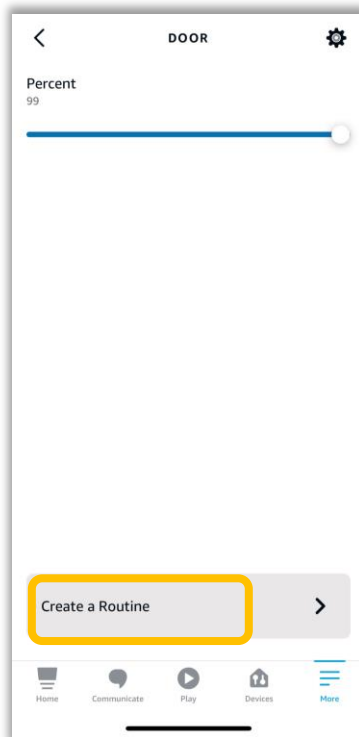

# SECTION 5(B) SCHEDULE OPERATION (PetPass Enable/Disable)

Schedule can be set via Amazon Alexa Mobile application. This can be used without Alexa speaker. For detailed steps, please refer the video guide. <https://youtu.be/E0s6mXGbTcI>

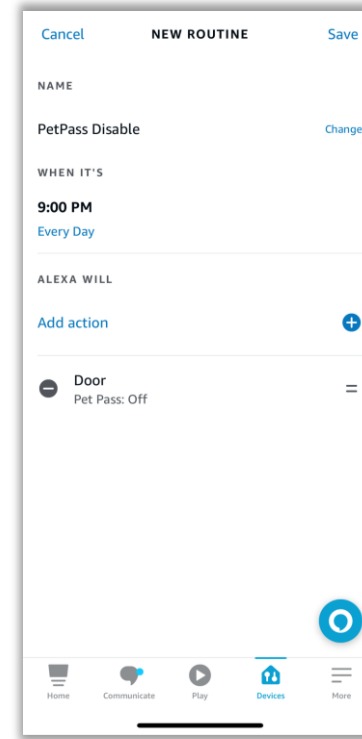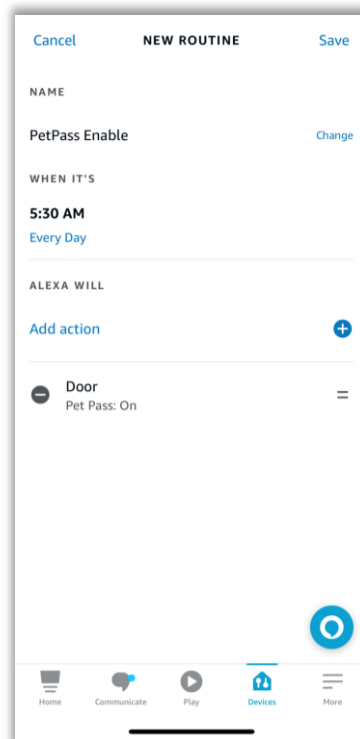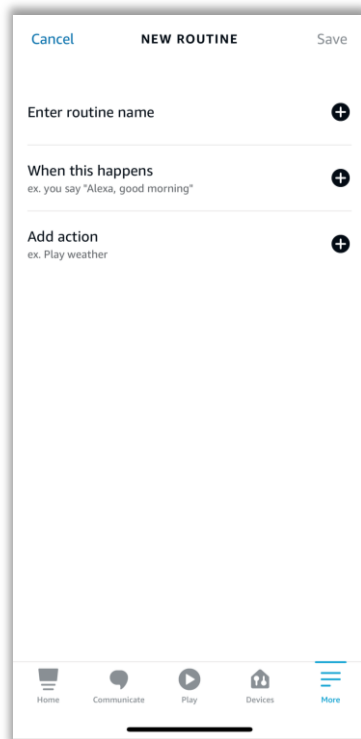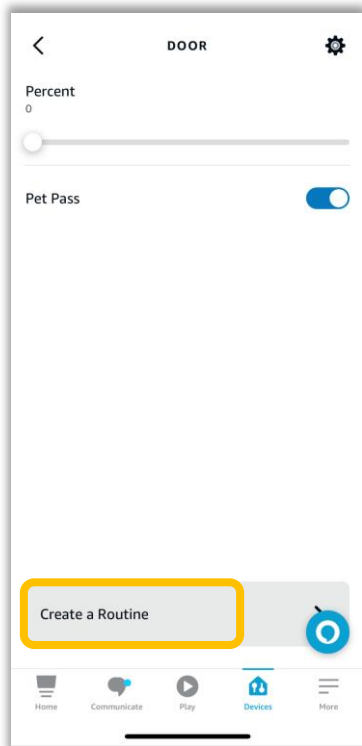

## SECTION 6 MANUAL OPERATION

Pull the string with one hand and slide the moving panel with another hand. It will detach the SmartSlydr head from the moving panel Corner Cap for manual operation.

**Tip:** You can avoid the self-latching of the SmartSlydr head with the Corner Cap during manual operation by this. Open the door/window through SmartSlydr fully (100%) position and then pull the string for manual mode.

# SECTION 7 SMARTSLYDR TROUBLESHOOTING


## A. SmartSlydr device not found in the application.

Try following the below steps.

- Unplug the power cord and plug it back in again after 10 seconds. Check if it fixed the issue.
- If not, factory reset the SmartSlydr.

## B. How to Factory Reset SmartSlydr?

- Keep the power connected. Please remove the linked PetPass/OneButton from the mobile app.
- Remove the SmartSlydr device from the mobile app settings page.
- Locate the reset button placed on the backside of the SmartSlydr.
- Slide your finger on the rubber part to feel the little bump that is located near the temperature sensor.
- The moment you press the button it will start making a sound.
- Keep the reset button pressed until the sound stops.
- SmartSlydr will be discoverable again in the application after a successful factory reset.

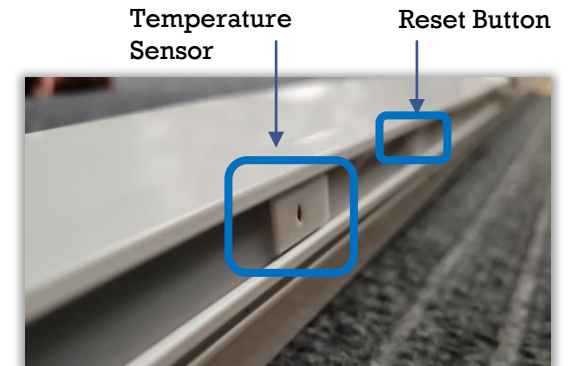

# TROUBLESHOOTING

- C. SmartSlydr application is stuck on waiting for the calibration screen with the spinner. No other message is being displayed on the app.**
- Please follow the factory reset process. Follow the setup process from step 3.
  - Make sure to enter the correct Wi-Fi password. Click on the view password button to double-check.
  - Check your Wi-Fi has internet access.
- D. SmartSlydr isn't moving after pressing the "Start Calibration".**
- Unplug the power cord and plug it back in again after 10 seconds. Check if it fixed the issue.
  - If not, factory reset the SmartSlydr.

# TROUBLESHOOTING

## **E. Door/window isn't opening or closing properly in the Calibration.**

- Please try to clean and lubricate the tracks and corner areas that blocks the movement. Easier way to identify where to lubricate is by observing the friction marks.
- Use the supplied lubricant oil to the affected areas.
- Remove anything blocking the path of the track like door stopper.
- Now try calibrating again.



# TROUBLESHOOTING

## **F. Corner Cap getting detached or getting misaligned.**

- Please attach the Corner Cap with the self-threading screw on the door/window frame to avoid this issue.





# TROUBLESHOOTING

## **G. Device is showing Offline in the mobile app, what should I do?**

- Please unplug the power cord, wait for 5 seconds, and plug it again.
- SmartSlydr will discover the Wi-Fi network immediately to make the connection.
- If you see this issue often, you need to improve your Wi-Fi connectivity. You can try placing the router closer to the device.
- If you are using the mesh routers the issue can be due to your primary router is connected with SmartSlydr that is further even though other router is placed very close to SmartSlydr. To eliminate this issue move the primary router further away to have connection with close by router or you can move primary close by to have connection with SmartSlydr.

# TROUBLESHOOTING - PETPASS

## H. PetPass/OneButton is not working, how to make sure it is paired correctly?

- Press the button on the Tag which one is configured in the first place in the mobile app, red light should blink once. For reference, Remote is configured in the first place in the photo.
- Press the button on the Tag which one is configured in the second place in the mobile app, red light should blink twice. For reference, Max is configured in the second place in the photo.
- If the light is slowly blinking continuously for every ~1 second, you may need to remove the Tag from the app and pair it again. Please follow the below steps to remove the Tag.
  - i. You need to remove the tag from the mobile app. Go to the Tag and click Remove the PetPass.
  - ii. Then long press the tag button until you see the solid red light then leave the button to power it off.
  - iii. Pair it again following steps from the guide on page 35 onward from the guide.

